


2 El. Richtantenne HB9 extended 20m + 40m

2 el. Directive HB9 extended 20m + 40m

2 el. Direttiva HB9 extended 20m + 40m

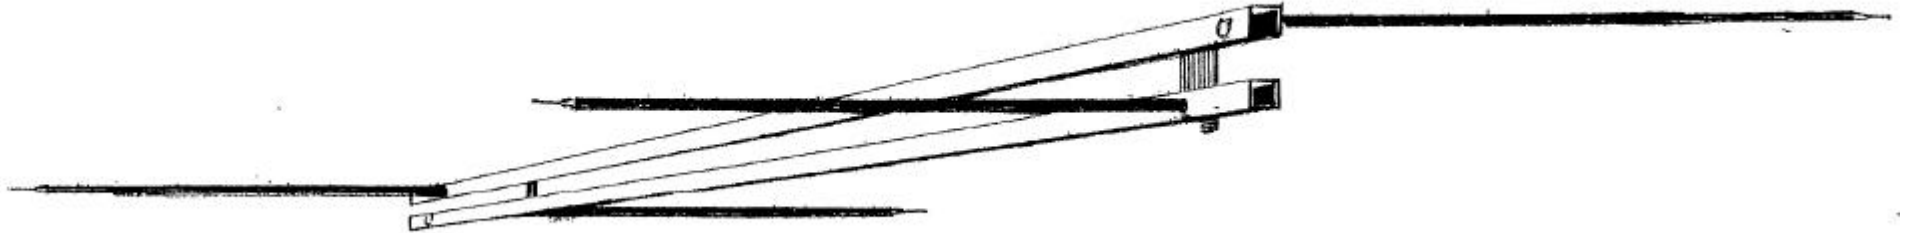

Technische Daten / Specifications / Caratteristiche

Frequenz frequency frequenze	:	14 MHz + 7 MHz
Impedanz impedance impedenza	:	52 Ohm
S.W.R. S.W.R. R.O.S.	:	20m 1:1,2 40m 1:1,0
Gewinn gain guadagno	:	6 dBi
Boomlänge boom length lunghezza boom	:	87 cm
Längstes Element longest element elemento piu lungo	:	150cm
Drehradius turning radius	:	160 cm
Anschluß connector connettore	:	SO 239
Gewicht weight peso	:	1,5 kg
Leistung power potenza	:	450 W SSB
Material material materiale	:	Aluminium (anticorodal)
Elemente elements elementi	:	Fiberglas Wendelstrahler helicoidal by fibreglass elicoidali in fibra